

Our packages

(End-to-End Construction)

SAMPLE
DESIGN

NEXT

Design & Drawings

Package Includes :

- 2D floor plans will be provided.
- **Note :** This Floor plan is just for your reference only, Floor plan for each project will be designed as per client's requirements.

Building Elevation :

- 2D Preliminary elevation view.
- 3D Elevation rendered view.
- 2D elevation working drawings.

Note : This elevation image is just for your reference only, Elevation for each project will be designed as per client's taste and requirement.

Structural Drawings :

- Center line marking drawings
- Excavation drawings
- Sump drawings
- Footings and Columns drawings
- Plinth beam drawings
- Roof slab shuttering drawings
- Roof slab reinforcement drawings
- Roof slab and Beam drawings for each level
- Staircase drawings

Structure & Civil

Steel :

- ISI standard FE-500/550 TMT Steel will be used as per structural requirement.
 - PrimeGold/Meenakshi or equivalent Brands will be used.
- Steel Rods starting from 6mm upto 20mm will be used according to the structural design and requirement.



Cement :

- ISI Standard 53 and 43 Grade cement will be used.
 - ACC, Birla or equivalent Brands will be used.
- 53 Grade will be used for Masonry and 43 Grade will be used for Plastering.



Blocks/Bricks :

- Standard Solid 6-inch and 4-inch concrete blocks will be used.

6-inch blocks for External walls and 4-inch blocks for internal walls

Note : Clay-bricks can be used with Extra cost of Rs.90/sqft and Wire-cut bricks for Rs.100/sqft on the package.



Sand :

- M-Sand will be used for Masonry and P-Sand will be used for Plastering.



Concrete :

- RCC Design mix will be used as per structural requirement.



Aggregates :

- 20mm and 40mm will be used.



Waterproofing :


- Dr.Fixit Water proofing solution will be used.



Kitchen

Kitchen Granite Platform :

- Cost of the Granite platform will be upto Rs.130/sqft.

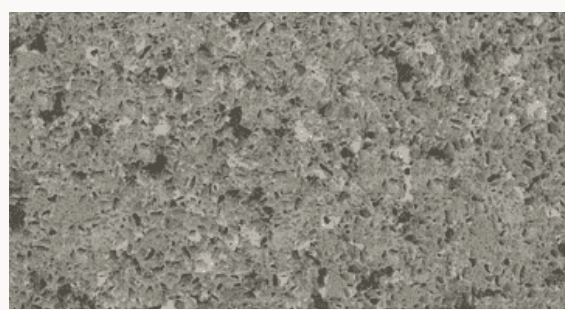

Ceramic Wall Tiles :

- Ceramic Wall Tiles worth upto Rs.50/sqft will be provided.

Height of the Wall tiles will be upto 2 feet above the Granite platform.



Kitchen Sink, Faucets and Accessories :

- Stainless Steel Single Bowl sink of worth upto Rs.4500 will be provided.
- Sink Faucet and Accessories worth upto Rs.1600 will be provided.



Bathroom

Sanitaryware and CP fittings :

- Sanitaryware and CP fittings will be used of worth upto Rs.50,000 per 1000 Square Feet of Construction.
- Includes EWC, Washbasin with Pillarcock, Wallmixer/Diverter, Health Faucet, Overhead shower with Arm, Concealed stopcock, CP fittings and Accessories.
- Note : Bathrooms will be waterproofed to remain free of leaks.



Ceramic Wall and Floor Tiles :

- Ceramic Wall tiles worth upto Rs.50/sqft and Floor tiles worth upto Rs.50/sqft will be provided.
- Height of the Wall tiles will be upto 7 feet above the Floor.
- Anti-Skid Ceramic Floor tiles will be provided.



CPVC/PVC :

- Astral brand CPVC and PVC will be used in Plumbing.



Bathroom Doors :

- Waterproof Flush Doors will be provided.

Woodwork

Main door and Frame :

- Teak Main door will be provided worth of Rs.25000 including frame and fixtures.
- Height and width of the Main door frame will be 7 feet X 3 feet 6 inches.
- Standard Door designs will be provided.

Windows :

- 3-track Aluminium sliding windows with 5mm clear glass will be provided.
- MS grill with 10mm square rods for windows will be provided.
- Height and Width of the Windows and Grill design will be as per company standards.

Internal Doors and Frames :

- Doors for internal rooms will be provided worth of Rs.9500 including frame and fixtures.
- SAL wood will be provided for Internal Door Frames.
- Primer coated Doors will be provided for Internal Rooms.
- Height and width of the internal door frame will be 7 feet X 3 feet.
- Thickness of the wood section will be 5 inches X 3 inches.
- Standard Door designs will be provided.

Painting

Interior Painting :

- 2-coats of JK wall putty will be done.
- 2-coats of Asian paints Tractor Shynee mulsion will be provided.



External Painting :

- 1-coat of Asianpaints Exterior Primer will be done.
- 2-coats of Asian paints ACE Weatherproof paint will be provided.

Metal and Wood Painting :

- 2-coats of Asian paints Enamel painting will be done for Window grills, balcony and Staircase MS railings.

Flooring

Living and Dining :

- Branded Vitrified tiles of worth upto Rs.80/sqft will be provided.

Balcony and Open areas :

- Anti-skid tiles of worth upto Rs.50/sqft will be provided.

Bedroom :

- Branded Vitrified tiles of worth upto Rs.70/sqft will be provided.

Parking :

- Anti-skid Parking tiles of worth upto Rs.50/sqft will be provided.



Electrical

Wires :

- Finolex or equivalent brand Fire-proof wires will be provided.
- Note : Electric fixing and fixtures like Fans, Bulbs, Motor, Meters, Meter Box etc., are not included in the package. It will be of additional cost.

Switches and Boards :

- Anchor Roma or equivalent Brand Switches and Panel boards will be provided.



Water Tanks

Overhead Tank :

- ISI standard multi-layered Water Tank will be provided.
- Water tank capacity starts from 1000 liters and the capacity depends on the total built-up area. It can be provided with the cost estimation.



Underground Sump/Tank :

- Underground Sump will be of 8" Solid concrete blocks with waterproof plastering.
- Sump tank capacity starts from 5000 liters and the capacity depends on the total built-up area. It can be provided with the cost estimation.

Fabrication

Staircase and Balcony Railings :

- MS Railings with Standard designs will be provided.
- Simple Designs will be provided.
- 16-gauge round/box pipes will be used.

Parapet wall

Parapet wall :

- Standard Parapet wall of height 3 feet will be provided.
- 4-inch Solid concrete blocks & both side plastering and painting will be done.

Add-ons

Anti-Termite treatment

Inverter provision

Solar provision

Exclusions from the Package

Borewell :

- Borewell is not included in the package

Interiors :

- Interiors are not included in the package.

Temporary Power :

- Client must provide Temporary power for the construction.
- Temporary power renewal should be done by Client every month until the Construction of project is completed.

Water for Construction of the project :

- Required amount of Water for construction of the project should be provided by the Client.

Compound wall & Gate :

- Compound wall and gate are excluded from the package.

Government approvals :

- Cost of Govt approvals is excluded from the package.
- We will help you to get the Approvals from the Government.

Electrical/BESCOM :

- Electrical Meters and Meter Box are not included in the package.
- BESCOM charges are NOT included in the package.

Road cutting :

- Road cutting charges for BESCOM and BWSSB are NOT included in the package.

Breaking/drilling Rock :

- Rock breaking or drilling expenses will be borne by Client.

Warranty

- Warranty upto 5 years will be provided for the Structure
- Warranty upto 1 year will be provided for waterproofing.

Note

- Civil Engineer will be assigned for the project for inspection and monitoring the quality of work and progress.
- Sheds would be constructed at site premises for material storage and Watchman/Labor.
- Soil Testing would be done by us before starting the construction.
- All the Brand's logos and Some product's images are mentioned just for understanding/reference purpose only. Actual product may look different from the images mentioned in this package.
- Floor plans and 3D elevations mentioned in this document is just for reference purpose only, the designs will change as per Site dimensions, Client's requirements etc.

Looking forward to serving you the Quality and Professional Construction service.
